

IB/2004/052697

REC'D 10 DEC 2004

WIPO

PC

PA 1254295

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

December 02, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.


APPLICATION NUMBER: 60/529,782 ✓

FILING DATE: December 16, 2003 ✓

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

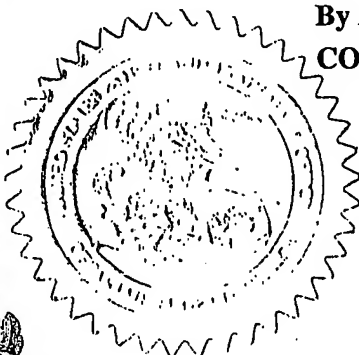

N. Williams
N. WILLIAMS

Certifying Officer

13049 U.S. PTO

Please type a plus sign (+) inside this box → 

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filling a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. EU778901117US

17858 U.S. PTO
60/529782

121603

INVENTOR(S)					
Given Name (first and middle [if any])		Family Name or Surname		Residence (City and either State or Foreign Country)	
Jing-Ming		Jong		Seattle, WA	
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
Ultrasonic Diagnostic Imaging System With Automatic Control of Penetration, Resolution and Frame Rate					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number		28159		Place Customer Number Bar Code Label here	
OR Type Customer Number here					
<input type="checkbox"/> Firm or Individual Name		W. Brinton Yorks, Jr.			
Address					
Address					
City		State		ZIP	
Country		Telephone	425-487-7152	Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		21		<input type="checkbox"/> CD(s), Number	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		3		<input checked="" type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76		Express Mail Certificate Receipt Confirmation Postcard			
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:				14-1270	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.				160.00	
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE



TYPED or PRINTED NAME W. Brinton Yorks, Jr.

TELEPHONE 425-487-7152

Date

12/16/03

REGISTRATION NO.

(if appropriate)

Docket Number:

28,923

PHUS030510

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

ULTRASONIC DIAGNOSTIC IMAGING SYSTEM WITH
AUTOMATIC CONTROL OF PENETRATION, RESOLUTION AND
FRAME RATE

5 This invention relates to medical diagnostic
imaging systems and, in particular, to diagnostic
imaging systems which automatically control
ultrasonic imaging for optimal tissue penetration,
imaging frame rate, and image resolution.

10 Ultrasonic diagnostic imaging applications
can differ widely in the imaging conditions
encountered. When imaging the fetal heart for
instance a high frame rate of display is required to
accurately image the detail of a rapidly beating
15 heart. In other applications such as the diagnosis
of tumors in the liver, a high frame rate is not
necessary but a high image quality (resolution) is
generally preferred. In some cases the pathology
being diagnosed may be deep within the patient's
20 body. In other cases the pathology may be just
beneath the skin. These widely differing conditions
mean that the sonographer frequently has to change a
wide variety of settings on the ultrasound system in
order to acquire the best images for a given
25 examination. It would be desirable to minimize the
number of ultrasound system settings which need to be
manipulated in order to set up the system for a new
exam. In particular, it would be desirable for many
of the manual settings of an ultrasound system to be
30 automated when possible so that the ultrasound system
would automatically optimize the operational settings
of the system on the basis of the examination being
performed.

35 In accordance with the principles of the present
invention, an ultrasonic diagnostic imaging system is

ATL-353

described which automates two of the most frequently used user settings, the Res/Speed control and the Pen/Gen/Res control. The Res/Speed control adjusts the trade-off between image quality (resolution) and frame rate (speed) by varying imaging parameters such as image line density, multiline order, and number of focal zones. The Pen/Gen/Res control adjusts the trade-off between image resolution and the depth of penetration of ultrasound through control of imaging parameters such as the transmit and receive frequencies. In an illustrated embodiment the setting of these controls is automated by sensing the amount of motion and/or noise in the anatomy being imaged. In response to the sensed image motion and/or noise, the relevant image parameters are automatically varied to obtain images which are a sensible balance of these competing factors.

In the drawings:

FIGURE 1 illustrates in block diagram form an ultrasonic diagnostic imaging system constructed in accordance with the principles of the present invention.

FIGURE 2 illustrates an implementation of a Res/Speed control on an ultrasound system and a Pen/Gen/Res control on an ultrasound system.

FIGURE 3 illustrates an ultrasound sector image which has been divided into image sub-regions for motion analysis.

FIGURE 4 illustrates a methodology for analyzing motion in successive ultrasound images.

FIGURE 5 illustrates the correlation of types of information in successive ultrasound images.

Referring first to FIGURE 1, an ultrasonic diagnostic imaging system constructed in accordance with the principles of the present invention is shown

ATL-353

in block diagram form. An ultrasonic scanhead 12 includes an array 14 of ultrasonic transducers that transmit and receive ultrasonic pulses. The array may be a one dimensional linear or curved array for
5 two dimensional imaging, or may be a two dimensional matrix of transducer elements for electronic beam steering in three dimensions. The ultrasonic transducers in the array 14 transmit ultrasonic energy and receive echoes returned in response to
10 this transmission. A transmit frequency control circuit 20 controls the transmission of ultrasonic energy at a desired time and at a desired frequency or band of frequencies through a transmit/receive ("T/R") switch 22 coupled to the ultrasonic
15 transducers in the array 14. The times at which the transducer array is activated to transmit signals may be synchronized to an internal system clock (not shown), or may be synchronized to a bodily function such as the heart cycle, for which a heart cycle
20 waveform is provided by an ECG device 26. When the heartbeat is at the desired phase of its cycle as determined by the waveform provided by ECG device 26, the scanhead is commanded to acquire an ultrasonic image. The ultrasonic energy transmitted by the
25 scanhead 12 can be relatively high energy (high mechanical index or MI) which destroys or disrupts contrast agent in the image field, or it can be relatively low energy which enables the return of echoes from the contrast agent without substantially
30 disrupting it. The frequency and bandwidth of the ultrasonic energy generated by the transmit frequency control circuit 20 is controlled by a control signal f_{tr} and the times at which individual elements in the array are actuated to steer and focus an ultrasonic
35 beam in a desired direction is controlled by a

ATL-353

control signal T_{st} . Both control signals are generated by a central controller 28.

Echoes from the transmitted ultrasonic energy are received by the transducers in the array 14, which generate echo signals that are coupled through the T/R switch 22 and digitized by analog to digital ("A/D") converters 30 when the system uses a digital beamformer. Analog beamformers may also be used. The A/D converters 30 sample the received echo signals at a sampling frequency controlled by a signal f_s generated by the central controller 28. The desired sampling rate dictated by sampling theory is at least twice the highest frequency of the received passband, and might be on the order of at least 30-40 MHz. Sampling rates higher than the minimum requirement are also desirable.

The echo signal samples from the individual transducers in the array 14 are delayed and summed by a beamformer 32 to form coherent echo signals in a desired beam steering direction specified by a control signal R_{st} . The digital coherent echo signals are then filtered by a digital filter 34. In this embodiment, the transmit frequency and the receiver frequency are individually controlled so that the beamformer 32 is free to receive a band of frequencies which is different from that of the transmitted band. The digital filter 34 bandpass filters the signals, and can also shift the frequency band to a lower or baseband frequency range. The digital filter could be a filter of the type disclosed in U.S. Patent No. 5,833,613.

Filtered echo signals from tissue are coupled from the digital filter 34 to a B mode processor 36 for conventional B mode processing. The B mode image may also be created from microbubble echoes returning

ATL-353

in response to nondestructive ultrasonic imaging pulses.

5 Filtered echo signals of a contrast agent, such as microbubbles, are coupled to a contrast signal processor 38. The contrast signal processor 38 preferably separates echoes returned from harmonic contrast agents by the pulse inversion technique, in which echoes resulting from the transmission of multiple pulses to an image location are combined to
10 cancel fundamental signal components and enhance harmonic components. A preferred pulse inversion technique is described in U.S. patent 6,186,950, for instance. The detection and imaging of harmonic contrast signals at low MI is described in U.S.
15 patent 6,171,246.

 The filtered echo signals from the digital filter 34 are also coupled to a Doppler processor 40 for conventional Doppler processing to produce velocity and power Doppler signals. The outputs of
20 these processors may be displayed as planar images, and are also coupled to a 3D image rendering processor 42 for the rendering of three dimensional images, which are stored in a 3D image memory 44. Three dimensional rendering may be performed as
25 described in U.S. patent 5,720,291, and in U.S. patents 5,474,073 and 5,485,842, all of which are incorporated herein by reference.

 The signals from the contrast signal processor 38, the B-mode processor 36 and the Doppler processor
30 40, and the three dimensional image signals from the 3D image memory 44 are coupled to a Cineloop® memory 48, which stores image data for each of a large number of ultrasonic images. The image data are preferably stored in the Cineloop memory 48 in sets,
35 with each set of image data corresponding to an image

ATL-353

obtained at a respective time. The sets of image data for images obtained at the same time during each of a plurality of heartbeats are preferably stored in the Cineloop memory 48 in the same way. The image data in a group can be used to display a parametric image showing tissue perfusion at a respective time during the heartbeat. The groups of image data stored in the Cineloop memory 48 are coupled to a video processor 50, which generates corresponding video signals for presentation on a display 52. The video processor 50 preferably includes persistence processing, whereby momentary intensity peaks of detected contrast agents can be sustained in the image, such as described in U.S. patent 5,215,094.

In accordance with the principles of the present invention a motion/noise processor 46 is provided to detect the motion of objects and/or noise in the image field. This is done in the illustrated embodiment by a correlation process such as a Pearson's correlation which will be discussed more fully below. The criteria against which the results of the correlation process are compared are determined by the setting of either a Res/Speed control or a Pen/Gen/Res control or both by user adjustment of a control on a user interface 150 as discussed below. The results of the detection of motion and/or noise in the image field are used to automatically adjust the settings of either or both of the Res/Speed control and the Pen/Gen/Res control. The adjustments optimize the operation of the ultrasound system to provide clearer, better resolved images by adjustment of imaging parameters in response to the outcome of the detection of motion and/or noise.

Examples of a Res/Speed control and a

ATL-353

Pen/Gen/Res control are shown in FIGURE 2. While these controls may be hardware knobs or sliders on a control panel, in this embodiment the controls are display controls generated by software on the screen of the ultrasound display 52. The controls may be displayed as dials or meters or other graphics displayed in various shapes and colors, and may have either qualitative or quantitative settings. In this embodiment both are qualitative bar displays 60. The Res/Speed control 62 is variable between "Res" (maximum resolution) and "Speed" (maximum frame rate) and proportions of these maximum settings therebetween. The Pen/Gen/Res control 64 is variable between "Pen" (maximum penetration) and "Res" (maximum image resolution) and proportions of these maximum settings therebetween centered around a nominal general setting "Gen". The effect of the current setting of each control is shown by a marker 66 in the bar, which is positioned in accordance with the effective setting currently applied to the ultrasound images. An arrow 68 can be adjusted by a user pointing device such as a trackball or key or mouse on the control panel 150 to manually set a control setting.

The Res/Speed control and the Pen/Gen/Res control can be independently set for either manual control or automatic control. When a control is set for manual control its setting can only be adjusted by manual manipulation of the user. When a control is set for manual control its marker 66 is greyed out and moves in tandem with the constantly aligned arrow 68 as the user adjusts the arrow to vary the control setting. When a control is set for automatic operation its marker 66 is brightly displayed and the arrow 68 and the marker can move independently. When

ATL-353

the user manually adjusts the arrow 68 in the automatic mode, the image will vary in response to the manual variation and the marker 66 will align with the last setting of the arrow. Once manual
5 control of the arrow is released, automatic operation commences. As the motion and/or noise characteristic of the image field is detected and used to determine appropriate automatic settings for the Res/Speed control and/or the Pen/Gen/Res control, the marker 66
10 will move automatically to show the current setting resulting from automatic control. The user can see at a glance how the automatic setting has changed from his or her last manual setting, and can see the response of the control setting to the motion and
15 noise detected in the image field.

If the user is dissatisfied with the response of the automatic operation of a control, the user can reset the position of the arrow 68 of the control. Resetting the arrow during automatic operation will
20 reset the balance of the respective performance factors of the control and will also adjust the manner in which the automatic adjustments discussed below are made. For instance, if the user resets the arrow toward more resolution (Res), the subsequent
25 automatic adjustments can more greatly favor changes in the direction toward a greater Res setting. Resetting the manual adjustment arrow of the controls can thus adjust the degree to which the automatic system balances the competing effects of resolution,
30 frame rate, and depth of penetration.

Motion-detecting capabilities are often found in ultrasound systems for a variety of purposes. Various sensors have been used to detect the motion of an ultrasound probe, such as those described in US
35 Pat. 5,529,070 (Augustine et al.) and US Pat.

ATL-353

5,538,004 (Bamber). Motion may also be sensed by comparing successive real time images as described in US Pats. 6,299,579 (Peterson et al.); 6,238,345 (Wissler et al.); 6,117,081 (Jago et al.); 5,782,766 (Weng et al.); 5,575,286 (Weng et al.); 5,566,674 (Weng); 5,899,861 (Freimel et al.); 5,910,114 (Nock et al.); and WO 00/24316 (Hossack et al.) The motion sensing or image alignment techniques described in these patents are used for purposes such as aligning individual images to create a panoramic image or to remove motional distortion from images. Any one of these techniques can be used in an automated system of the present invention. In an embodiment of the present invention the motion or alignment information is used to adjust the Res/Speed setting. Higher image quality and a lower frame rate setting is employed when motion is relatively low, and lower image quality and a higher frame rate is employed when motion is relatively high.

20 An embodiment of an automated control of the present invention can start with a sequence of ultrasound images such as image 70 in FIGURE 3. Each image is analytically divided into a plurality of blocks 72 of a predetermined pixel size, such as 8 pixels by 8 pixels or 16 pixels by 16 pixels. For a rectangular image the blocks may be oriented in a rectilinear grid pattern. For a sector image such as image 70 of FIGURE 3 the blocks can be arranged in a curve-linear fashion according to the curvature of the sector. Motion is then computed between corresponding blocks of successive images, as shown in FIGURE 4. In this illustration a block 82 of pixels in Img 1 acquired at one point in time is compared with the neighborhood of a corresponding block 84 of an image Img 2 acquired at a different

ATL-353

point in time. The next motion computation uses the block 84 in Img 2 and a corresponding block 86 in image Img 3 acquired at another point in time. For each block a motion vector can be derived by finding
5 the maximal Pearson correlation between the two pixel patterns. The formula for this computation is:

$$\rho = \frac{\sum_{x,y} (I_{t1}(x,y) - \bar{I}_{t1})(I_{t2}(x+d_x, y+d_y) - \bar{I}_{t2})}{\sqrt{\sum_{x,y} (I_{t1}(x,y) - \bar{I}_{t1})^2} \sqrt{\sum_{x,y} (I_{t2}(x+d_x, y+d_y) - \bar{I}_{t2})^2}}$$

10 where $I(x,y)$ is the pixel intensity at coordinates (x,y) , the indices $t1$ and $t2$ indicate image frames at different time point, \bar{I} is the average intensity in the pixel block, and (d_x, d_y) is the
15 magnitude (distance) and direction of the local motion between two image frames. The correlation value ρ indicates the reliability of the motion vector (d_x, d_y) .

The motion vectors and/or correlation coefficients for a plurality of blocks are then
20 examined. The motion vectors and/or correlation coefficients for all of the blocks can be examined, or only a selected set of blocks can be used such as those in the center of the image 70. If the magnitude of the motion vectors is large for most
25 blocks, or the correlation value ρ is low for most blocks, the frame rate is increased by incrementing the setting of the Res/Speed control from Res toward Speed. The resultant command from the motion/noise processor 46 to the central controller 28 causes the
30 central controller to change the commands to the probe 12 in a manner which increases the frame rate. One way to do this is to increase the angle or

ATL-353

spacing of the beam steering between adjacent beams through a change to the beam steering parameter T_{st} . With the beams more widely spaced, fewer beams will be transmitted in the area or volume scanned by the probe which causes the frame rate to increase. That is, with fewer beams to transmit and receive to acquire a frame or volume, the image area can be scanned in less time. The increase in the beam spacing decreases the spatial sampling of the image area or volume, causing a corresponding decrease in image resolution. Another way to do this is to increase the multiline order: instead of receiving one or two receive beams in response to a transmit beam, the point spread function can be changed to receive two or four receive beams in response to each of a lesser number of transmit beams. Yet another possibility is to reduce the number of focal zones of the image. For instance, each pair of consecutive focal zones can be combined into one focal zone, with the focus set at the boundary of the two original zones. Thus, the Res/Speed setting has been adjusted in a direction which tends to increase frame rate (Speed) but with decreased image resolution (Res).

Correspondingly, if the magnitude of the motion vectors is small for most blocks, or the correlation value ρ is high for most blocks, indicating little motion between images, the image quality is increased by changing the setting from Speed to Res. The command from the motion processor 46 to the central controller 28 now effects an increase in the beam density by changing the beam steering parameter T_{st} to transmit a greater number of more closely spaced transmit beams which are properly received by a change of the receive beam parameter R_{st} . The multiline order can also be decreased from four to

ATL-353

two or two to one, for instance, for a greater number of transmit beams. The number of focal zones can also be increased by splitting one or more current focal zones into two. These changes will all effect
5 an adjustment of the Res/Speed setting in a direction which tends to increase image resolution (Res) with a decrease in the frame rate (Speed).

As these adjustments are made the position of the marker 66 is changed accordingly in the Res/Speed
10 bar 62. This is generally done by changing the value for the marker which is sent from the motion/noise processor 46 to a graphics processor (not shown) which processes the graphic overlay of the Res/Speed control for display with the ultrasound image.

15 A similar approach can be used to automatically adjust the Pen/Gen/Res control 64 setting as a function of image signal/noise. FIGURE 5 illustrates the decorrelation of pure speckle images with motion. This plot is made of the change in correlation as a
20 planar imaging probe travels in the elevational direction. As it does so and the image plane moves in the elevational direction, the speckle information begins to decorrelate over the entire image. In FIGURE 5 the X-axis is the distance of travel of the
25 probe in mm and the Y-axis is the correlation between images. The different curves represent the change in correlation at different image depths shown by the legends in box 94. It can be seen that the correlation changes at different rates, depending
30 upon image depth. The solid line curves indicated at 90 for near and mid-field depths show a smooth decline in correlation as the image plane travels, gradually decreasing with increasing distance. However, the dashed curves indicated at 92 for the
35 far field (greater depths) are marked by a sharp drop

ATL-353

with a small change in distance, followed by a more gradual decrease. This large initial drop in correlation is believed to be caused by the decorrelation of electronic noise (signal/noise) in the far field and directly related to imaging penetration. A response to a sharp drop in correlation is an adjustment of the Pen/Gen/Res setting toward increased penetration (Pen), as for example by decreasing the transmit frequency or switching from harmonic frequency reception to fundamental frequency reception. See, by comparison, US Pat. 6,458,083 (Jago, et al.) and US Pat. 6,283,919 (Roundhill et al.) By aligning consecutive image frames through motion compensation and computing the image decorrelation, an appropriate adjustment can be made to the Pen/Gen/Res control to render the best image resolution with optimal imaging penetration. This feature is particularly useful when the clinician is frequently changing the imaging depth during scanning.

Turning again to FIGURES 3 and 4, the correlation is computed for a plurality of pixel blocks 72 of consecutive images. The correlation in the far field is compared with the correlation in the near and/or mid field or the correlation for the entire image. If the correlation is relatively low in the far field and the correlation is relatively high elsewhere, the penetration is increased by adjusting the Pen/Gen/Res control from Res or Gen toward Pen. This effects a command from the motion/noise processor 46 to the central controller 28 which causes the central controller to command a change in the operating frequency. This can be effected by changing the transmit frequency parameter f_{tr} to a lower transmit frequency, reducing the passband of

ATL-353

the digital filter 34, or a combination of the two.
If blended fundamental/harmonic information is used
in the far field, the blending ratio of the two types
of signal content can be adjusted in favor of more
5 fundamental signal frequency content. Alternatively,
more pulses can be transmitted in each beam direction
and greater signal averaging employed.
Corresponding, the marker 66 of the Pen/Gen/Res
control bar 64 is adjusted toward the Pen end of the
10 control on the displayed graphic.

Similarly, if the correlation is relatively high
throughout the image, that is, is not particularly
low in the far field, the operating frequency can be
increased to increase resolution, and the Pen/Gen/Res
15 control is adjusted from Pen or Gen toward Res. The
motion processor commands the central controller 28
to increase the operating frequency by increasing the
value of the transmit frequency parameter f_{tr} ,
increasing the passband of the digital filter 34, or
20 both. If blended fundamental/harmonic information is
used in the far field, the blending ratio of the two
types of signal content can be adjusted in favor of
more harmonic signal frequency content. A
corresponding adjustment toward Res is made to the
25 marker 66 displayed in the Pen/Gen/Res control 64.

In an embodiment of the present invention, more
efficient computation may be obtained by using fewer
pixel blocks 72 and the sum of absolute difference
(SAD) algorithm. See US Pat. 6,442,298 (Olsson et
30 al.) Corresponding pixel blocks of successive images
can be compared to compute the motion (displacement)
vector from block to block over the time interval
between the two images. Then, using this vector, one
of the image is warped (aligned) with the other on
35 either a local or global basis. See US Pat.

ATL-353

5,566,674 (Weng). This alignment reduces the decorrelation between images due to probe or tissue motion, leaving the signal/noise (electronic noise) factor as a decorrelative effect. The number of
5 pixel blocks used in the alignment computation can be fewer than the number used in the subsequent correlation analysis to reduce computation time, if desired. The correlation of the aligned or warped
10 images is then computed as described above to automatically adjust the Pen/Gen/Res control setting.

ATL-353

WHAT IS CLAIMED IS:

1. A method for automatically adjusting the relationship between image resolution (Res) and real
5 time frame rate (Speed) of an ultrasound system
comprising:
acquiring a plurality of ultrasound images over
time;
sensing the relative motion between temporally
10 different ultrasound images; and
increasing the image resolution and decreasing
the frame rate in response to relatively less sensed
motion or decreasing the image resolution and
increasing the frame rate in response to relatively
15 greater sensed motion.
2. The method of Claim 1, wherein sensing
comprises calculating the correlation of the pixel
content of temporally different ultrasound images,
20 wherein a relatively high correlation
corresponds to relatively less motion and a
relatively low correlation corresponds to relatively
greater motion.
- 25 3. The method of Claim 1, wherein sensing
comprises sensing relative motion with a probe motion
sensing device.
- 30 4. The method of Claim 1, wherein sensing
comprises sensing relative motion by analyzing the
image content of successive ultrasound images.
5. The method of Claim 1, wherein the
ultrasound system includes a Res/Speed display of the
35 relationship between image resolution and frame rate;

ATL-353

and further comprising automatically adjusting
Res/Speed display in correspondence with a change
made to the image resolution and/or frame rate.

5 6. The method of Claim 5, wherein the
Res/Speed display includes a user adjustable setting
which enables a user to manually balance the
relationship between image resolution and frame rate
of the ultrasound system.

10 7. The method of Claim 6, wherein manual
adjustment of the Res/Speed display adjusts the
manner in which subsequent automatic adjustments to
the balance between image resolution and frame rate
15 will be made.

 8. The method of Claim 1, wherein the frame
rate is changed by changing at least one of the
transmit beam density, multiline order, number of
20 focal zones, or number of transmit pulses.

 9. The method of Claim 8, wherein the image
resolution is changed by changing the spatial
sampling of the image field.

25 10. A method for automatically adjusting the
relationship between image resolution (Res) and the
depth of penetration (Pen) of an ultrasound system
comprising:

30 acquiring a plurality of ultrasound images over
time;

 calculating the electronic noise between
temporally different ultrasound images; and

 increasing the image resolution in response to
35 relatively less electronic noise or increasing the

ATL-353

penetration in response to relatively greater electronic noise.

5 11. The method of Claim 10, wherein calculating the electronic noise comprises calculating the decorrelation of electronic noise between regions of successively acquired images.

10 12. The method of Claim 11, wherein calculating the electronic noise further comprises comparing the correlation of far field signals with the correlation of signals elsewhere in the images.

15 13. The method of Claim 12, wherein when the comparison shows a relatively low correlation in the far field and a relatively high correlation elsewhere, the operating frequency of the ultrasound system is automatically decreased, and when the comparison shows a relatively high correlation in the
20 far field and elsewhere, the operating frequency of the ultrasound system is automatically increased.

25 14. The method of Claim 10, wherein increasing the image resolution comprises increasing at least one of the transmit or receive frequency of the ultrasound system, and wherein increasing the penetration comprises decreasing at least one of the transmit or receive frequency of the ultrasound system.

30 15. The method of Claim 10, further comprising aligning the temporally different ultrasound images prior to calculating the electronic noise.

35 16. The method of Claim 10, wherein the

ATL-353

ultrasound system includes a Pen/Gen/Res display of the relationship between image resolution and depth of penetration; and further comprising automatically adjusting Pen/Gen/Res display in correspondence with
5 a change made to the balance between resolution and penetration.

17. The method of Claim 16, wherein increasing the image resolution comprises increasing an
10 operating frequency of the ultrasound system; wherein increasing the penetration comprises decreasing an operating frequency of the ultrasound system; and wherein automatically adjusting the Pen/Gen/Res display comprises adjusting the display toward Pen
15 when the operating frequency is decreased and adjusting the display toward Res when the operating frequency is increased.

18. The method of Claim 17, wherein
20 automatically adjusting the Pen/Gen/Res display comprises adjusting the display toward Pen when fundamental frequency operation is performed and adjusting the display toward Res when harmonic operation is performed.

25 19. The method of Claim 17, wherein the operating frequency comprises at least one of the transmit frequency or the receive frequency.

30 20. The method of Claim 16, further comprising manually adjusting the Pen/Gen/Res display to adjust the manner in which automatic adjustments to the balance between resolution and penetration will be made.

35

ATL-353

21. An ultrasonic diagnostic imaging system comprising:

a probe including an array transducer;
a transmitter coupled to apply drive signals to
5 the array transducer;

a receiver coupled to process signals received
by the array transducer;

a display coupled to the receiver which displays
received ultrasound images;

10 a sensor coupled to the probe which senses
relative motion in the image field;

a Res/Speed display responsive to the sensor
which is shown on the display to depict the relative
balance between image resolution and frame rate,

15 wherein the transmitter is responsive to the
sensor for adjusting the frame rate of the ultrasound
images.

22. An ultrasonic diagnostic imaging system
20 comprising:

a probe including an array transducer;

a transmitter coupled to apply drive signals to
the array transducer;

25 a receiver coupled to process signals received
by the array transducer;

a display coupled to the receiver which displays
received ultrasound images;

a sensor coupled to the probe which senses
electronic noise in the image field;

30 a Pen/Gen/Res display responsive to the sensor
which is shown on the display to depict the relative
balance between image resolution and penetration,

wherein the transmitter is responsive to the
sensor for adjusting the penetration of transmitted
35 drive signals.

ATL-353

ULTRASONIC DIAGNOSTIC IMAGING SYSTEM WITH
AUTOMATIC CONTROL OF PENETRATION, RESOLUTION AND
FRAME RATE

5 Abstract of the disclosure:

10 An ultrasonic diagnostic imaging system and
method are presented in which the balance between
image resolution and frame rate (Res/Speed) and the
balance between image resolution and penetration
(Pen/Gen/Res) are automatically adjusted in response
to image content. A motion detector analyzes the
relative motion between successive images. If the
motion content is relatively high, the imaging
15 parameters are changed in favor of relatively greater
frame rate and reduced resolution. A low motion
content causes the opposite adjustment. The
electronic noise between successive images is also
computed with a relatively high noise content (low
20 correlation) in the far field resulting in an
adjustment to penetration as by lowering the transmit
frequency. A relatively low noise content causes an
adjustment in favor of increased resolution.

ATL-353

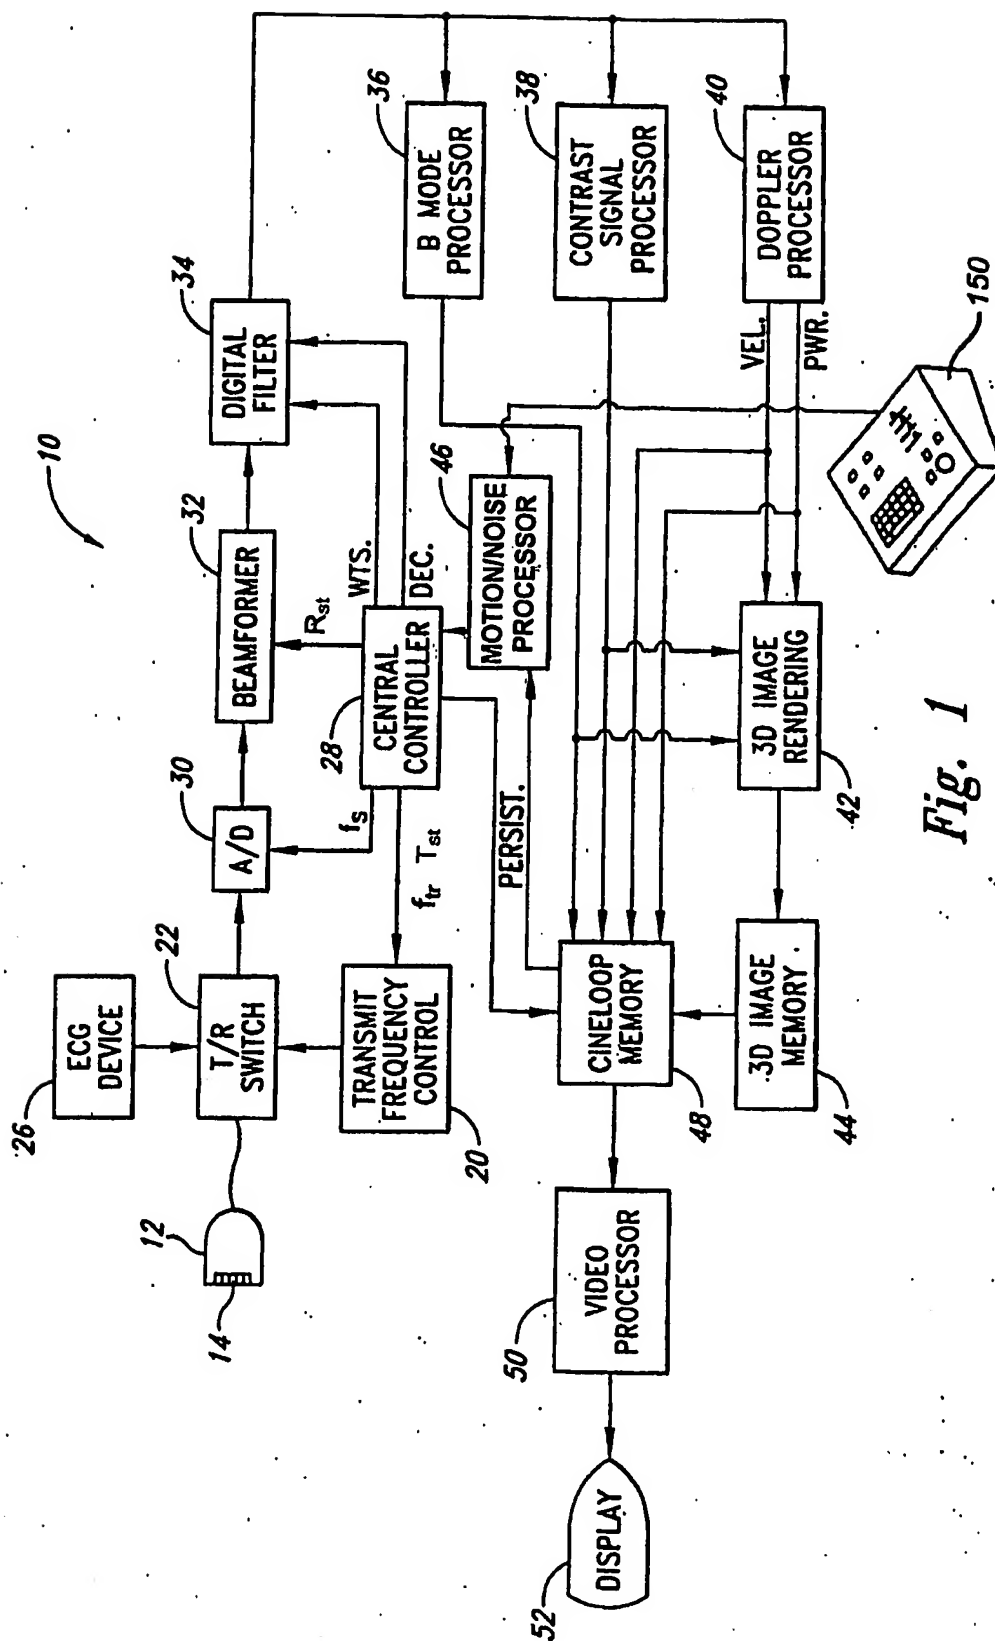


Fig. 1

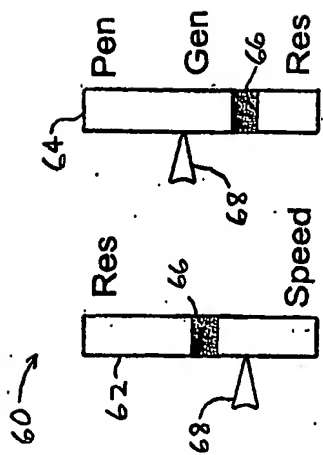


Fig. 2

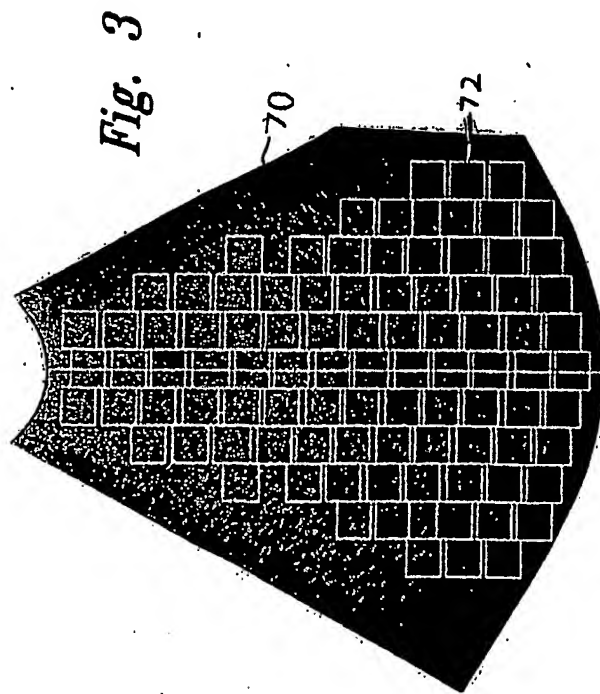


Fig. 3

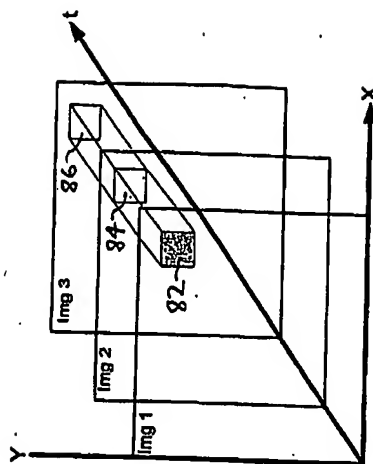


Fig. 4

Fig. 5

